Closet Connector Housing (CCH) Panel, pigtailed, LC Connectors Duplex, 24 F, 62.5 µm multimode (OM1)

Part Number:
CCH-CP24-A8-P03KH

Corning closet connector housing (CCH) pigtail panels are CCH panels (CCH-CP) with factory-terminated and -tested pigtails installed. They accommodate all industry-standard connector adapter types including the LC, ST® compatible, SC, SC duplex, FC and MT-RJ, as well as the keyed LC. Depending on connector type, they are available in 6-, 8-, 12-, 16- and 24-fiber capacities. Pigtail panels provide easier routing than pigtail modules when the pigtails will be routed and spliced within the same housing. Available with both ribbon and 900 µm tight-buffered MIC® cable types, each CCH pigtail panel is factory terminated and tested. Each module is shipped assembled with adapters and connectorized pigtails installed to the customer's specifications.Many of our fiber optic hardware products are highly configurable. If you don't see what you are looking for here, please review the ordering matrix contained in the family spec sheet found on the right, or contact Customer Care at 1-800-743-2675.

Features and Benefits

Universal design approach
One-size-fits-all LANscape® Solutions housings

Broadest range of fiber count and adapter types
Solutions for all needs

Colored icon labeling
Easy connector identification

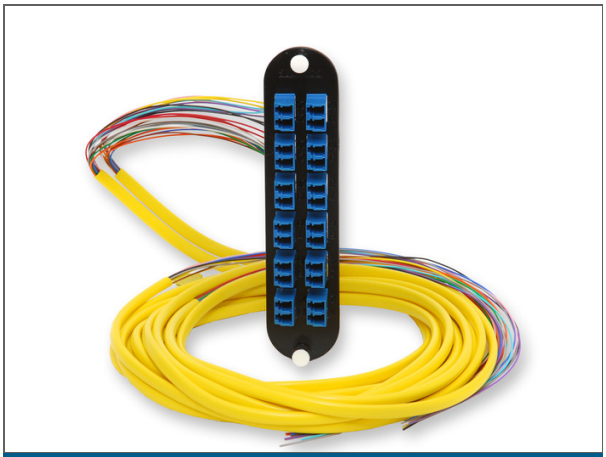

Closet Connector Housing (CCH) Panel, pigtailed, LC connectors, Duplex, 24 F, 62.5 µm multimode (OM1)

Closet Connector Housing (CCH) Panel, pigtailed, LC Connectors Duplex, 24 F, 62.5 µm multimode (OM1)

CORNING

Specifications

General Specifications	
Fiber Category	62.5 µm MM (OM1)
Cable type stubbed	MIC® Cable subunit

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU

Design	
Number of Adapters per Panel	12
Fiber Count	24
Pigtail Length	3 m (9.84 ft)

Cable Design	
Fiber Count	24

Design - Adapter	
Housing Color	Beige
Housing Material	Composite
Adapter Style	Standard
Adapter Type	LC duplex
Insert	Ceramic

Connector Specs	
Housing Color	Beige

Closet Connector Housing (CCH) Panel, pigtailed, LC Connectors Duplex, 24 F, 62.5 µm multimode (OM1)

CORNING

Specifications - Connector A	
Housing Color	Beige
Polish	UPC

Ordering Information	
Product Number	CCH-CP24-A8-P03KH
Package Contents	CCH Adapter Panel with 3 m pigtail; installation guide
Units per Delivery	1/1

RoHS COMPLIANT

Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.